



eTo11- Ceiling Mount Type AP w/ POE Model No : IAP6089

eTo inc.,

5F-7, NO.161, Gongyi Rd.,
West District, Taichung City,
403 Taiwan, R. O. C.

Tel: 886-4-852-9443

Fax: 886-4-853-6475

Website: www.etotek.com.tw

IAP6089 Product Description

- Complies with IEEE 802.11n draft and 802.11b/g standards
- A compact AP fits for ceiling mount
- Simple and easy installation
- Advance security features, including WEP, WPA, WPA2, IEEE802.1x, MAC filtering
- Supports standard Power Over Ethernet, complies with IEEE802.3af
- Use existing Ethernet cabling system, no re-wiring
- Invisible and could blend with all interior decoration
- Manageable and controllable
- High power wireless transmission (up to 23 dBm)
- Supports Gigabit Ethernet port



Product Spec.

Standard : IEEE 802.11n draft 2.0 and 802.11 b/g

Ports : One 10/100/1000 RJ45 Ports

Standard LED : Ethernet Ports, Wireless

Antenna : Embedded antenna

Transmit Power : up to 200mW, typical 100mW

Security : 64/128-bits WEP, IEEE 802.1x, WPA-PSK(TKIP/AES)

WEP-EAP(TKIP/AES), WPA2-PSK(TKIP/AES), WPA2-EAP(TKIP/AES)

Management : Secured Web-based, Windows-base and uPNP Discovery
SNMP V1 & V2

Syslog: Local Web-base syslog, BSD remote syslog (syslog server)

Advance Feature

Hardware : Hardware watchdog timer

Networking : DHCP client & server, packet filtering

WDS: up to 6 links, WDS link with WEP encryption


Firmware : HTTP or TFTP

Public hotspot support : Link integrity

wireless client isolation

AP load balancing

Association control

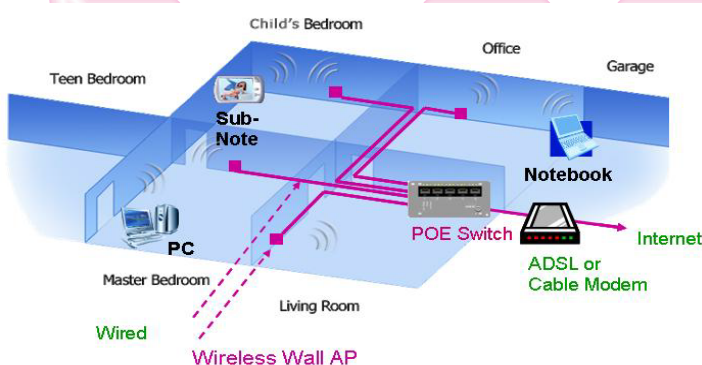

IAP6089



General Spec.

Dimensions : 125mm x 125mm x 64mm
(L x W x D)

Unit Weight : 150g

Power : Power over Ethernet (48V,
125mA) 3.3V 1A (optional)

Certification : FCC, CE, IC-03

Operating Temp. : 0-40 Degree C

Storage Temp. : -20 ~ 70 Degree C

Operating Humidity : 5% ~ 95%

(Non-condensing)

Storage Humidity : 10% ~ 85%

(Non-condensing)